

PHILIPS xxBDL3452T Firmware Update

Firmware FB03.04

Select below link, the firmware will start to download on your PC.

<https://www.dropbox.com/s/1ikzkfievco0up6/update.zip?dl=0>


In the root of an USB disk (FAT32) copy above **update.zip** file, do not unzip the file!

Plug-in the USB storage device into the monitor.

Select "settings"




Select "Android settings"

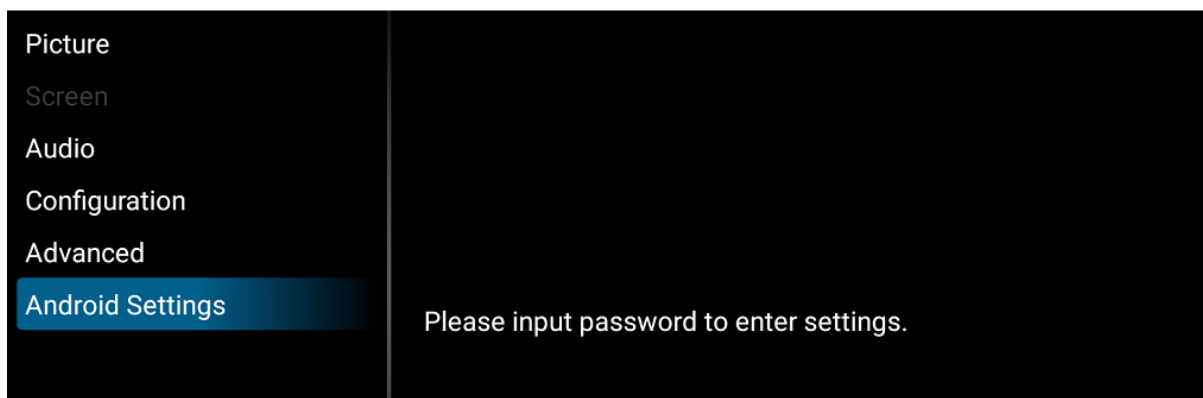


Enter password: 1234


Select "signage display"

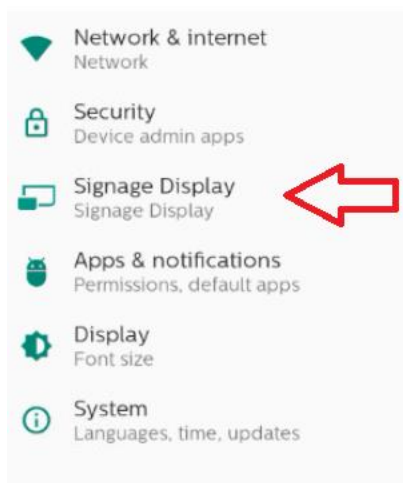


Select "system updates"

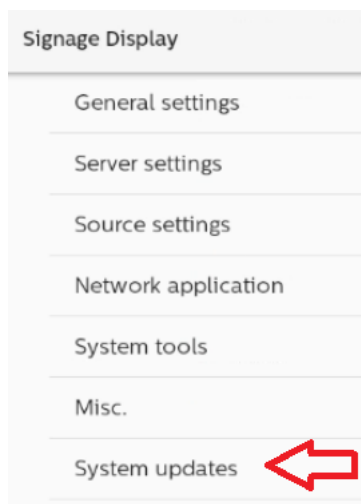

Select "local update"



The USB device with the firmware will be recognized automatically.
Select the update.zip file and press ok.

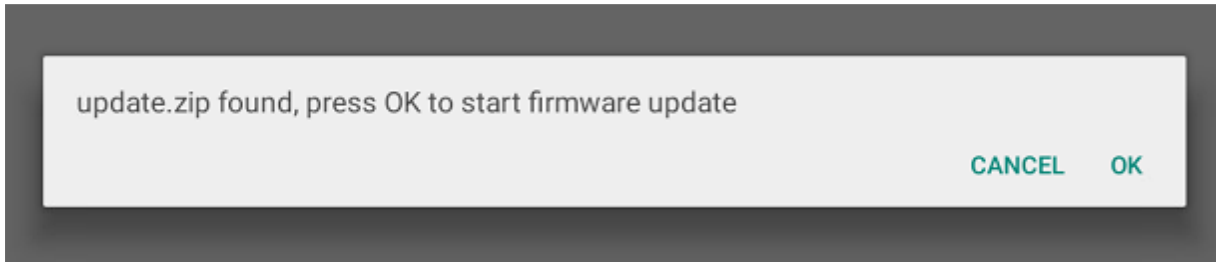


The monitor will reboot to perform the update.

Remove the USB stick once finished. AC OFF/ON the monitor.

Check the firmware version on the monitor:

press INFO,7,7 on the Remote Control and check if the “Android FW version” is correct updated, see pict below as example.

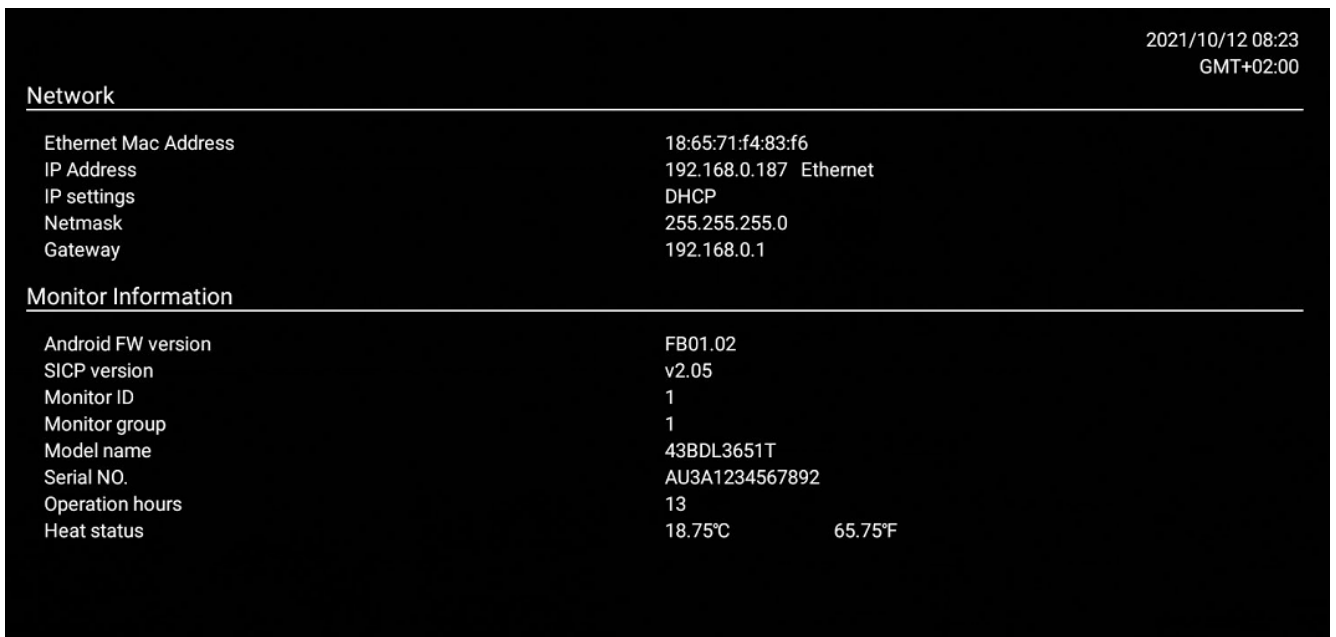

A factory reset is not mandatory.

How to perform a factory reset press the home1999return buttons in a sequence on the remote control.

The factory menu will appear on the left, select factory reset.

```

Brand                Philips
Model                43BDL3651T
SW Ver               FB01.02
EP9461E Ver         19
Date                 Mon Aug 2 19:04:54 CST 2021
Scaler               MSD96BUXM8C
Panel                TPP430WR-QUBF70.K NWPF
SN                   AU3A1234567892
ADC Adjust           >
W/B Adjust           >
SSC Adjust           >
EQ Adjust            >
Burn In              Off
Others               >
Start adbd
Erase EDID
Factory Reset
Exit
  
```

The monitor will reboot and go in standby, power on the monitor and follow the instructions on the monitor.